


## Pressure Release Sub DYNAWELL

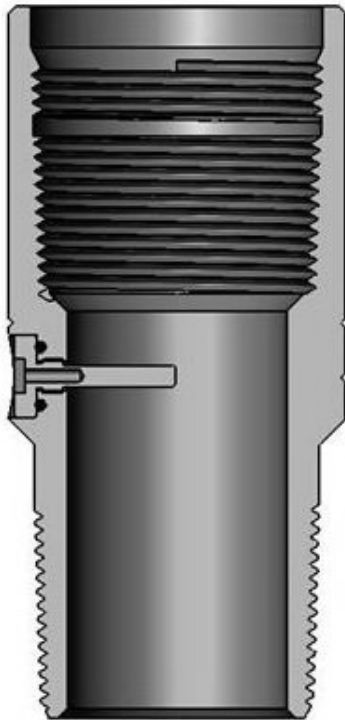

### Technical Information

**SPECIFICATIONS:**

PRESSURE RATING  
68.9 MPa 10,000 psi

TEMPERATURE RATING 230 °C / 450 °F  
DEPENDING ON O-RING TYPE, SPECIFY  
WELL TEMPERATURE ANTICIPATED WHEN  
ORDERING.

DESIGNED TO ALLOW EQUALIZATION  
BETWEEN ANNULUS AND TUBING STRING  
FOR WELLS WITH HIGH SOLIDS  
PRODUCTION BY BREAKING A STEEL  
HOLLOW PIN

**RECOMMENDATIONS:**

USE OF APPROPRIATE REDRESSS KIT

**AVAILABLE SIZES:**

<b>Size</b>	<b>60mm / 2.375"</b>	<b>73mm / 2.875"</b>
<b>Maximum O.D.</b>	77,8 mm / 3.062"	93,2 mm / 3.668"
<b>Connection</b>	2 3/8" EU PIN	2 7/8" EU PIN
<b>Minimum I.D.</b>	50.7mm / 1.995"	62mm / 2.441"

Revision: RP04012AA

### Selection Chart

Part No.	Size (mm / in)	Max. O.D. (mm / in)	Weight (kg)	Dimensions (mm)	Part No. Redress Kit
2316773	60mm / 2.375"	77,8 mm / 3.062"	2.0	165.0 x 77.8	2316774
2316796	73mm / 2.875"	93,2 mm / 3.668"	3.3	177.8 x 93.2	2316797