


Radioactive Marker Sub DYNAWELL

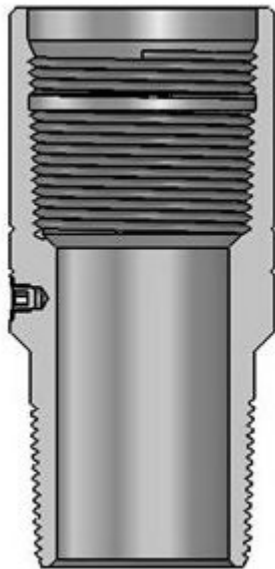

Technical Information

SPECIFICATIONS:

PRESSURE RATING
68.9 MPa 10,000 psi

DESIGNED TO HOLD RADIOACTIVE SOURCE AND BE PLACED IN A TCP STRING FOR CORRELATION PURPOSES. THE R.A. - SOURCE IS HIGHLY VISIBLE ON GAMMA/NEUTRON LOGS AND ALLOWS ACCURATE PERFORATING GUN SPACE OUT OR PLACEMENT

RADIOACTIVE SOURCE IS NOT INCLUDED IN THE ASSEMBLY, AVAILABLE UPON REQUEST DEPENDING ON EXPORT / IMPORT LICENSES AND TRANSPORT

AVAILABLE SIZES:

Manufactured by LRI

Size	60mm / 2.375"	73mm / 2.875"
Maximum O.D.	78mm / 3.062"	93mm /3.668"
Connection	2 3/8" EU PIN	2 7/8" EU PIN
Minimum I.D.	50.7mm /1.995"	62mm / 2.441"

Revision: RP04013AA

Selection Chart

Part No.	Size (mm / in)	Max. O.D. (mm / in)	Weight (kg)	Dimensions (mm)	Part No. Redress Kit
2310849	60mm / 2.375"	78mm / 3.062"	2.0	165.1 x 78.0	N/A
2310865	73mm / 2.875"	93mm /3.668"	3.3	177,6 x 93.0	N/A