


Shaped Charge DYNAWELL 23g GH St

Type	Part No.	Classification	CE No.	UN No.	D.O.T.
RDX	2316418	1.4S	0080.EXP.06.0026	0441	EX2006080014
HMX	2316423	1.4S	0080.EXP.06.0026	0441	EX2006080014

Technical Drawing

(all dimensions in mm)

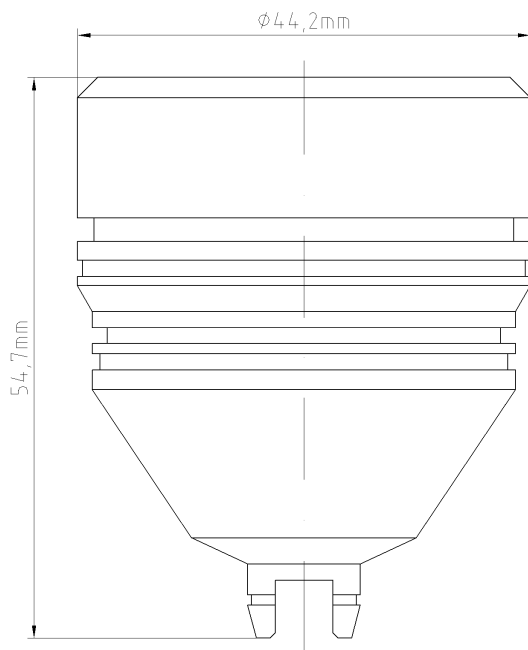

Technical Information

APPLICATION:

TEMPERATURE RESISTANT DEEP PENETRATING SHAPED CHARGE FOR USE IN EXPENDABLE HOLLOW STEEL CARRIER GUN SYSTEMS FOR OILFIELD APPLICATIONS.

EXPLOSIVES CONTENT:

23g

SHAPED CHARGE TYPE:

DEEP PENETRATING SHAPED CHARGE WITH STEEL CASE AND DETONATING CORD CLIP.

PRESSURE RATING:

THE CHARGE CAN ONLY BE USED IN THE RECOMMENDED GUN SYSTEMS WITH THEIR APPROPRIATE PRESSURE RATINGS.

TEMPERATURE RESISTANCE:

RDX: 165 ° C / 1 h 330 ° F / 1 h
 HMX: 205 ° C / 1 h 400 ° F / 1 h
 HNS: 260 ° C / 1 h 500 ° F / 1 h

GUN CONFIGURATION:

GUN SIZE		SHOT DENSITY		PHASING
["]	[mm]	[spf]	[spm]	[°]
3 3/8	86	4	13	90
3 3/8	86	6	20	60
4	102	6	20	60

SHELF LIFE:

5 YEARS AT STORAGE CONDITION:
 + 5 ° C TO + 30 ° C + 41 ° F TO + 86 ° F
 max. 65 % RELATIVE HUMIDITY
 GOOD VENTILATION

DISPOSAL:

SHAPED CHARGES SHOULD BE DESTROYED ONLY BY AUTHORISED PERSONS (ACCORDING TO NATIONAL LAW AND REGULATION).

Packing Information

Quantity per box	50	pcs
Gross weight per box	12,4	kg
Net weight per box	10,4	kg
NEC per box	1,2	kg
Dimensions of box	40 x 40 x 16	cm
Product weight	/	g
Package Type	Carton + Vacuum Bag	
		TD Z
		Revision: RP07039AC