


DYNAWELL Oiltronic II Firing Panel

Item	Part No.	Weight	Dimensions
Oiltronic II Firing Panel	2315416	1 kg	25x27,5x11,5cm

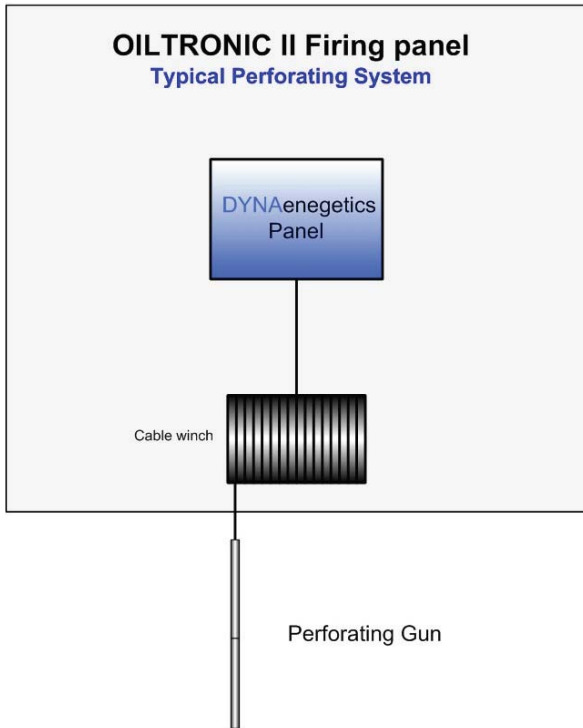

Technical Information

APPLICATION:
DESIGNED TO INITIATE DYNAWELL SINGLE SHOT RF-SAFE ELECTRONIC INITIATOR.

SPECIFICATIONS:
The DYNAenergetics OILTRONIC II Firing Panel is designed to be a standalone product which can activate perforation guns in a well boring using DYNAWELL RF-Safe Electronic Initiators.

Powered GR-Tools which have been modified with a high voltage GR-Switch DYNAWELL (Part No. 2818001) can be used.

The Panel is mounted inside a carrying case, together with an integrated battery charger.

Note: Older panels use Banana jacks for the wireline connection rather than a BNC connector.



TECHNICAL DATA:

- Safety key
 - High mode switch for high resistance cables
 - 2 hand operation for initiation
 - Shot indication after initiator has been fired
 - Main power button with signal light
 - Charger 100 VAC – 230 VAC, 50 – 60 Hz
 - Connectors:
- | | | |
|------------------------|--------|---------|
| Wireline Banana Jacks: | Red | Signal+ |
| | Black | Armor |
| Wireline BNC | Center | Signal+ |
| | Case | Armor |

Revision: IK00000AA