


## 1 7/16" DOUBLE SEALED CONTACT SUB ASSEMBLY

| Item  | Part No. | Weight | Dimensions |
|---|----------|--------|------------|
| 1 7/16" DOUBLE SEALED CONTACT SUB ASSEMBLY                        | 2312732  | 0.5 kg | ø37x135 mm |
| # 1: O-RING 260 °C / 500 °F                                       | 2313371  | ---    | ---        |
| # 2: BOOT FOR ELECTRIC CONNECTION                                 | 2819332  | ---    | ---        |
| ELECTR. CONTACT REDRESS KIT FOR 1 7/16" DOUBLE SEALED CONTACT SUB | 2320655  | ---    | ---        |

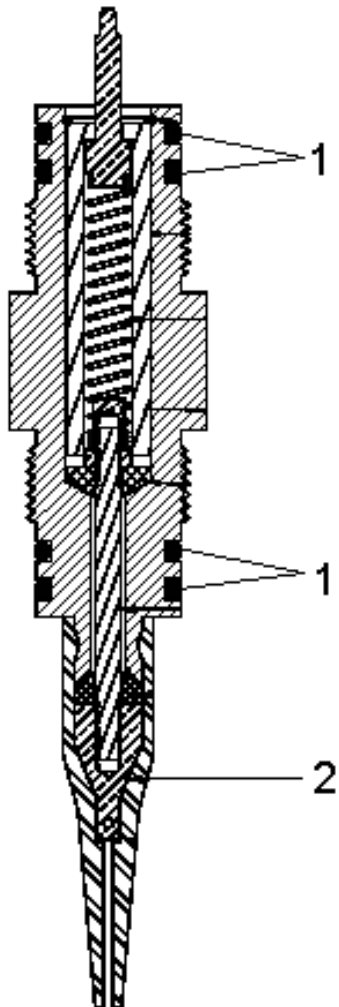

### Technical Information

**SPECIFICATIONS:**

DESIGNED FOR MECHANICAL AND ELECTRIC CONNECTION.

TOP CONNECTOR THREAD:  
1 3/16" – 12 THD. TYPE „A“ PIN

BOTTOM CONNECTOR THREAD:  
1 3/16" – 12 THD. TYPE „C“ PIN

TEMPERATURE RATING DEPENDING ON O-RING TYPE

**AVAILABLE SIZES:**

ONE SIZE AVAILABLE ONLY

**RECOMMENDATIONS:**

CHECK INSULATION AND CONTINUITY BEFORE EACH RUN.

CHECK O-RING INTEGRITY BEFORE EACH RUN.

Revision: HH05011AD