



Gun System DYNAWELL 178mm 16.5spm 60°

Configuration Schematic

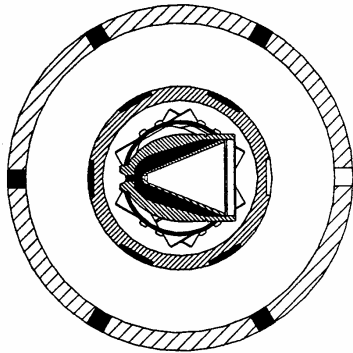

Shot Pattern

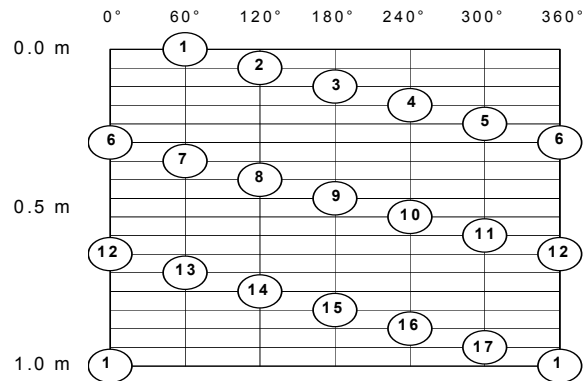

Technical Information

| Shot Interval | Gun Length | Shot Total | Gun Weight w/o explosive components | Carrier Specifications: |
|---------------|------------|------------|-------------------------------------|--|
| 1 m | 1.38 m | 18 | 70 kg net | Pressure Rating 130 MPa 18,900 psi Temperature Rating 230 °C 450 °F Tensile Strength 280,000 daN 630,000 lbs Tandem Shot Spacing 0.44 m 1.45 ft Carrier Thread 3.438" - 6 TPI Acme Gun system loaded with zinc charges only to be shot in fluid. |
| 2 m | 2.38 m | 34 | 121 kg net | |
| 3 m | 3.38 m | 50 | 172 kg net | |
| 4 m | 4.38 m | 67 | 223 kg net | |
| 5 m | 5.38 m | 83 | 275 kg net | |
| 6 m | 6.38 m | 100 | 325 kg net | |

Selection Chart

| Item | 1 m | 2 m | 3 m | 4 m | 5 m | 6 m |
|--------------------------------|---------|-----|-----|-----|-----|-----|
| Gun System for 32g DP1/DP2/BH | - | - | - | - | - | - |
| Charge Tube for 32g DP1/DP2/BH | - | - | - | - | - | - |
| Gun System for 39g DP1/DP2/BH | - | - | - | - | - | - |
| Charge Tube for 39g DP1/DP2/BH | - | - | - | - | - | - |
| Carrier | - | - | - | - | - | - |
| Retention Ring | 7903024 | | | | | |
| Booster Kit | 2315319 | | | | | |
| Spacer Gun Kit | / | | | | | |

Revision: RP02031AA