Top Sub DYNAWELL Wireline

Technical Drawing

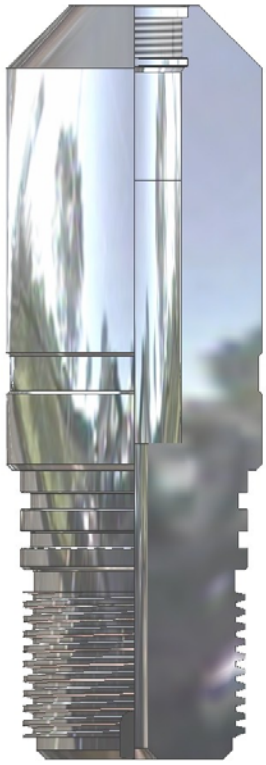

Technical Information

APPLICATION:

TOP SUB FOR WIRELINE USE IN EXPENDABLE HOLLOW RETRIEVABLE PERFORATING SYSTEMS.

TOP SUB SPECIFICATIONS:

PRESSURE RATING:
172 MPa 25,000 psi

TEMPERATURE RATING:
DEPENDING ON O-RING TYPE AS SPECIFIED BELOW.

TOP THREAD TYPE:
1 3/16" – 12 THD Type "A" BOX

Packing Information

Sub O.D.		Product Weight	Dimensions of Product
40mm	1 9/16"	- kg	22.0 x 4.0 cm
51mm	2"	- kg	22.0 x 5.1 cm
70mm	2 3/4"	4.9 kg	22.0 x 7.0 cm
73mm	2 7/8"	5.4 kg	22.0 x 7.3 cm

Revision: IK02013AF

Selection Chart

Sub O.D. [mm]	Sub O.D. ["]	Thread Type Bottom ["]	Part No. Top Sub	Part No. O-Ring	Temperature Rating O-Ring
40	1 11/16	(6 TPI Acme)	2315880	2316332	260 °C / 500 °F
51	2	1.687 (6 TPI Acme)	2315875	2315727	260 °C / 500 °F
70	2 3/4	2.375 (6 TPI Acme)	2315227	2313370	260 °C / 500 °F
73	2 7/8	2.375 (6 TPI Acme)	2315230	2313370	260 °C / 500 °F

www.dynaenergetics.com dynawell@dynaenergetics.com Tel.: +49 (0)5102 6757 0

DYNAenergetics GmbH & Co. KG warrants only title to the equipment, products, materials and supplies and that the same are free from defects in workmanship and materials. There are no warranties, expressed or implied, of merchantability fitness or otherwise, which extend beyond those stated in the immediately preceding sentence. DYNAenergetics liability and Customer's remedy in any case of action arising out of the sale or use of any equipment, products, materials and supplies is expressly limited to the replacement of such equipment, products, materials and supplies on their return to DYNAenergetics or, at DYNAenergetics option, to the allowance to the Customer of credit for the cost of such items. In no event shall DYNAenergetics be liable for special, incidental, punitive or consequential damages.