


Booster Kit DYNAWELL slim

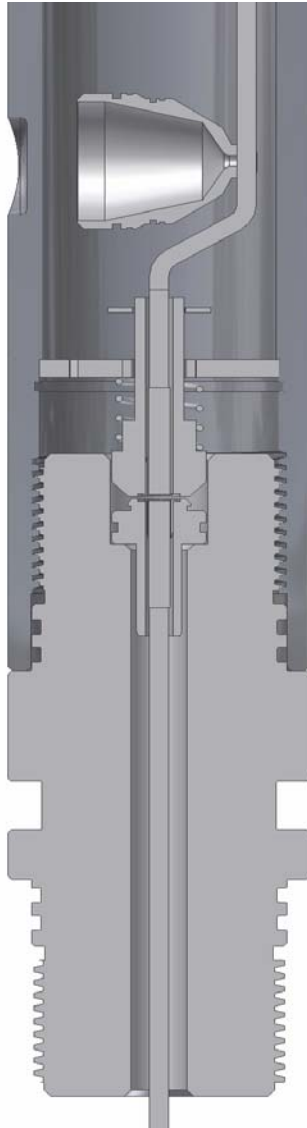

Technical Information

SPECIFICATIONS:

TEMPERATURE RATING
230 °C / 450 °F

DESIGNED TO EFFICIENTLY TRANSFER
THE DETONATION BETWEEN MULTIPLE
GUN ASSEMBLIES

AVAILABLE SIZES:

KIT TO BE USED FOR ALL THROUGH
TUBING HOLLOW CARRIER PERFORATING
SYSTEMS DYNAWELL FROM 40mm TO
51mm

Selection Chart

Partnumber	Type	Temperature Rating °C / °F	Weight Kg	Dimension mm
2315723	Booster Kit DYNAWELL slim	230 / 450	0,1	10 x 10 x 10

Revision: FP04025AA