


Handling Sub DYNAWELL

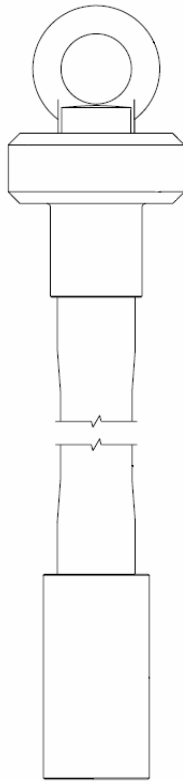

Technical Information

SPECIFICATIONS:

DESIGNED TO HANDLE AND LIFT THE PERFORATING GUN ASSEMBLY IN RIG ELEVATORS, TUGGER LINE OR AIR HOIST WHILE CONNECTIONS ARE BEING MADE UP

AVAILABLE SIZES:

REFER TO SELECTION CHART BELOW

RECOMMENDATIONS:

CHECK THAT ALL CONNECTIONS OF HANDLING SUB AND CONNECTION TO GUN SYSTEMS DYNAWELL IS MADE UP TIGHT

Revision: RP04023AA

Selection Chart

Part No.	Size (mm / ")	Weight (kg)	Max. Weight on Lifting Eye at 0° (kg)	Max. Weight on Lifting Eye at 45° (kg)	Dimensions (mm)
-	43 / 1.687	-	3600	2400	-
-	54 / 2.125	-	3600	2400	-
-	70 / 2.750	24,3	3600	2400	1534 X 150
2314409	73 / 2.875	24,3	3600	2400	1534 X 150
2316151	70 – 73 Top Sub	24,3	3600	2400	1534 X 150
2316152	86 / 3.375	30,4	3600	2400	1534 X 150
23116153	102 / 4.000	30,5	3600	2400	1544 X 150
2310878	114 / 4.500	32,0	3600	2400	1549 x 150
2316150	86 – 114 Top Sub	30,8	3600	2400	1509 x 150
2315572	178 / 7.000	-	3600	2400	-

Other Sizes available on request