Junk Shot DYNAWELL St HMX 54mm

Part No.	Classification	CE No.	UN No.	D.O.T.
2315885	1.1D	0080.EXP.97.0002	0349	EX2004020042

Technical Drawing

(all dimensions in mm)

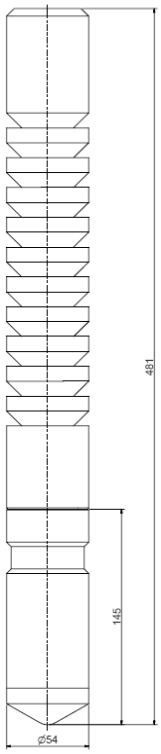

Technical Information

APPLICATION:
TEMPERATURE RESISTANT SHAPED CHARGE FOR OILFIELD USE.
SPECIALLY DESIGNED ON ORDER

EXPLOSIVE CONTENT:
109 G hmx

OUTSIDE DIAMETER:
2 1/8”

TEMPERATURE RESISTANCE:
HMX: 205 °C / 1h 400 ° F / 1h

SHELF LIFE:
5 YEARS AT STORAGE CONDITION:
+ 5 °C TO + 30 °C + 41 °F TO + 86 °F
max. 65% RELATIVE HUMIDITY
GOOD VENTILATION

DISPOSAL:
SHAPED CHARGES SHOULD BE DESTROYED ONLY BY AUTHORISED PERSONS (ACCORDING TO NATIONAL LAW AND REGULATION).

RECOMENDATION:
TO BE USED WITH DETONATOR DW 0026 S

Packing Information

Quantity per Box	1	pcs
Gross weight per box	-	kg
Net weight per box	-	kg
NEC per box	0,109	kg
Dimensions of box	73 x 73 x 11,5	cm
Product weight per m	-	g
Package Type	Cardboard Box	

TD P-P-12 | Revision: IK18005AB

DYNAenergetics GmbH & Co. KG warrants only title to the equipment, products, materials and supplies and that the same are free from defects in workmanship and materials. There are no warranties, expressed or implied, of merchantability fitness or otherwise, which extend beyond those stated in the immediately preceding sentence. DYNAenergetics liability and Customer's remedy in any case of action arising out of the sale or use of any equipment, products, materials and supplies is expressly limited to the replacement of such equipment, products, materials and supplies on their return to DYNAenergetics or, at DYNAenergetics option, to the allowance to the Customer of credit for the cost of such items. In no event shall DYNAenergetics be liable for special, incidental, punitive or consequential damages.