



Through Tubing Gun System DYNAWELL 43mm Link 20spm


Configuration Schematic




Shot Pattern 60°



Configuration Schematic



Shot Pattern 90°

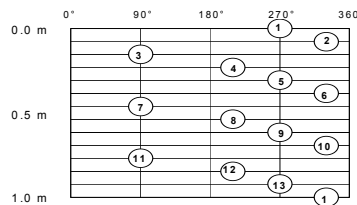

System Components

Item	Part No.	Weight kg
Firing Head Link	2314293	0,1
Bottom Nose	2819175	0,1
Accessory Kit Link for Z480 or 1018	2311156	0,15
Accessory Kit Link for 1015 E or 1423	2311157	0,15

Shaped Charge DYNAWELL 8g DP Link 20spm
 Shaped Charge DYNAWELL 10.25g DP Link 20spm
 (includes Link Holder)

It is recommended to use one Accessory Kit Link per run.

Revision: IK03004AF

Technical Information

Carrier Specifications:

Max O.D.	43mm (1.6875")
Min I.D. For Running	45mm (1.78")
Pressure Rating	Depending on Shaped Charge Type
Firing Head Thread	1 3/16-12 Type "B"
Debris/Charge	Depending on Shaped Charge Type

Gun Configuration:

Shot [spf]	Density [spm]	Phasing [°]
6	20	60 / 90 / 180

Maximum recommended running length is 7.5m (24.6ft).