



## Through Tubing Gun System DYNAWELL 54mm Link 13spm


### Configuration Schematic




#### Shot Pattern 60°

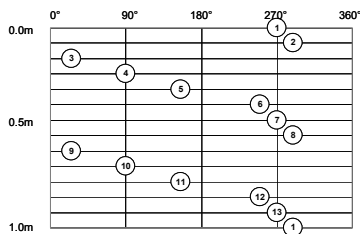

### Configuration Schematic



#### Shot Pattern 90°

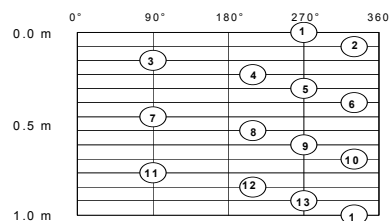

### System Components

Item	Part No.	Weight kg
Firing Head Link	2314293	0,1
Bottom Nose	2819175	0,1
Accessory Kit Link for Z480 or 1018	2311156	0,15
Accessory Kit Link for 1015 E or 1423	2311157	0,15

Shaped Charge DYNAWELL 13g DP Link 13spm (includes Link Holder)

It is recommended to use one Accessory Kit Link per run.

Revision: IK03005AG

### Technical Information

#### Carrier Specifications:

Max O.D.	54 mm (2.125")
Min I.D. For Running	57 mm (2.25")
Pressure Rating	Depending on Shaped Charge Type
Temperature Rating	Depending on Shaped Charge Type
Tensile Strength	2,000 N (450 lbs)
Firing Head Thread	1 3/16-12 Type "B"
Debris/Charge	Depending on Shaped Charge Type

#### Gun Configuration:

Shot [spf]	Density [spm]	Phasing [°]
4	13	60 / 90 / 180

Maximum recommended running length is 7.5m ( 24.6ft ).