Through Tubing Gun System DYNAWELL 54mm Strip 13spm

Configuration Schematic

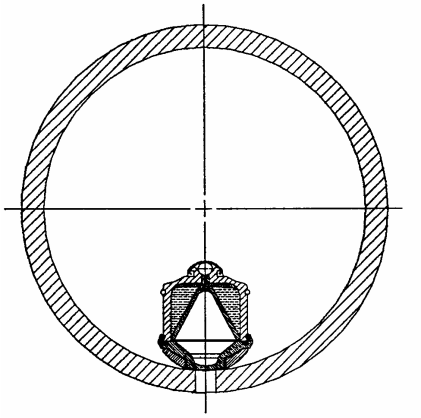

Shot Pattern

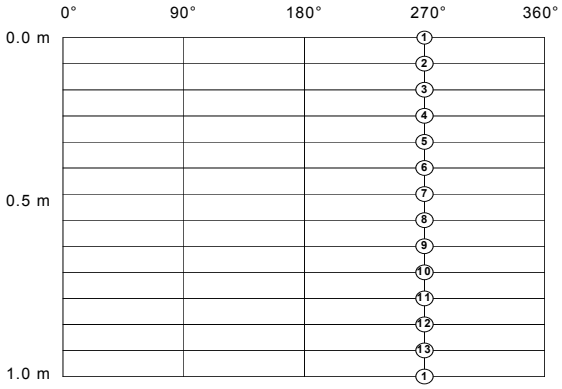

System Components

Item		Part No.	Weight kg
Firing Head Strip		2819076	0,1
Bottom Nose Kit		2819092	0,1
Accessory Kit Strip for Z 480 or 1018		2819449	0,15
Accessory Kit Strip for 1015 E or 1423		2311155	0,15
Tandem Strip Adapter		2819142	0,13
Carrier Strip	1m	2315269	0,5
	2m	2315271	1
	3m	2315273	1,5

Shaped Charge DYNAWELL 13g DP Strip

It is recommended to use one Accessory Kit Strip per run.

Revision: IK03010AG

Technical Information

Carrier Specifications:

Max O.D.	54 mm (2.125")
Min I.D. For Running	57 mm (2.25")
Pressure Rating	Depending on Shaped Charge Type
Temperature Rating	Depending on Shaped Charge Type
Tensile Strength	2,000 N (450 lbs)
Tandem Shot Spacing	0.16 m (0.52 ft)
Firing Head Thread	1 3/16-12 Type "B"
Debris/Charge	Depending on Shaped Charge Type

Gun Configuration:

Shot Density [spf]	Shot Density [spm]	Phasing [°]
4	13	0

Maximum 2 Strips per run are recommended.

www.dynaenergetics.com dynawell@dynaenergetics.com Tel.: +49 (0)5102 6757 0

DYNAenergetics GmbH & Co. KG warrants only title to the equipment, products, materials and supplies and that the same are free from defects in workmanship and materials. There are no warranties, expressed or implied, of merchantability fitness or otherwise, which extend beyond those stated in the immediately preceding sentence. DYNAenergetics liability and Customer's remedy in any case of action arising out of the sale or use of any equipment, products, materials and supplies is expressly limited to the replacement of such equipment, products, materials and supplies on their return to DYNAenergetics or, at DYNAenergetics option, to the allowance to the Customer of credit for the cost of such items. In no event shall DYNAenergetics be liable for special, incidental, punitive or consequential damages.