



Through Tubing Gun System DYNAWELL 54mm Strip 20spm

Configuration Schematic

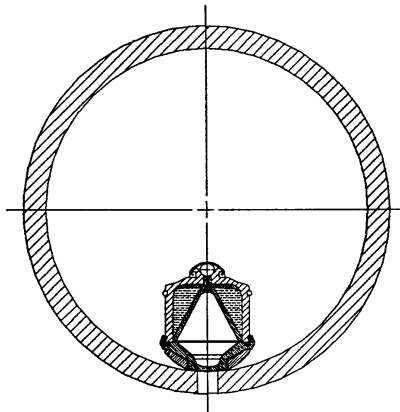

Shot Pattern

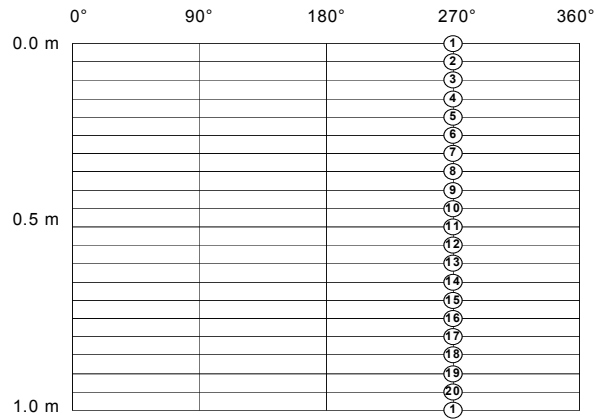

System Components

Item	Part No.	Weight kg
Firing Head Strip	2819076	0,1
Bottom Nose Kit	2819092	0,1
Accessory Kit Strip for Z 480 or 1018	2819449	0,15
Accessory Kit Strip for 1015 E or 1423	2311155	0,15
Tandem Strip Adapter	2819142	0,13
Carrier Strip	1m 2315270	0,5
	2m 2315272	1
	3m 2315274	1,5

Technical Information

Carrier Specifications:

Max O.D.	54 mm (2.125")
Min I.D. For Running	57 mm (2.25")
Pressure Rating	Depending on Shaped Charge Type
Temperature Rating	Depending on Shaped Charge Type
Tensile Strength	2,000 N (450 lbs)
Tandem Shot Spacing	0.16m (0.52 ft)
Firing Head Thread	1 3/16-12 Type "B"
Debris/Charge	Depending on Shaped Charge Type

Gun Configuration:

Shot Density [spf]	Phasing [°]
6	20
	0

Shaped Charge DYNAWELL 13g DP Strip

It is recommended to use one Accessory Kit Strip per run.

Maximum 2 Strips per run are recommended.

Revision: IK03011AF